
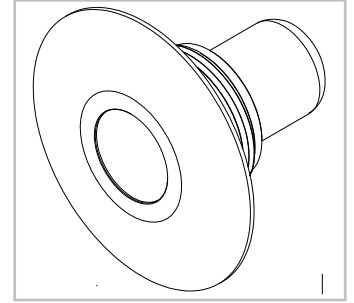
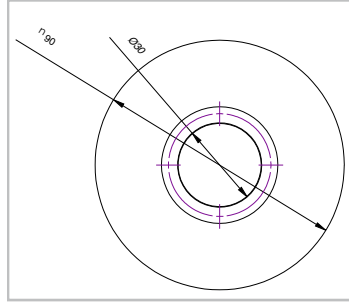


# RICKY

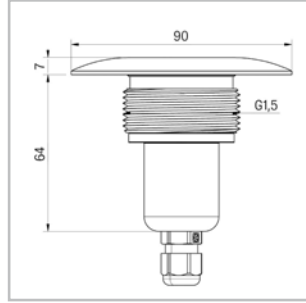

### Dynamique

	RGBW (4000K)	RGBW (3000K)	Blanc dynamique
Power supply	350mA*		
Power	5W max		
Initial flow (lm)	900 lm		
Average LED lifespan	L90 B10 60000h		
Connection	Serie**		
Cable	9x0.22mm <sup>2</sup> - 3m resin-coated		
Code	RI30252Z	RI30260W	ES30275X

### Monochrome constant voltage

	2700°K	3000°K	4000°K	6000°K
Power supply	@12VDC - 500 mA			
Power	7W			
Initial flow (lm)	970 lm			
Average LED lifespan	L90 B10 60000h			
Connection	Parallel**			
Cable	3x0.5mm <sup>2</sup> - 3m resin-coated			
Code	Inox 316L Electropoli : RI00203			

### 12VDC wiring

